


**Figure 9.1031 Illustration of a Tree Protection Zone**

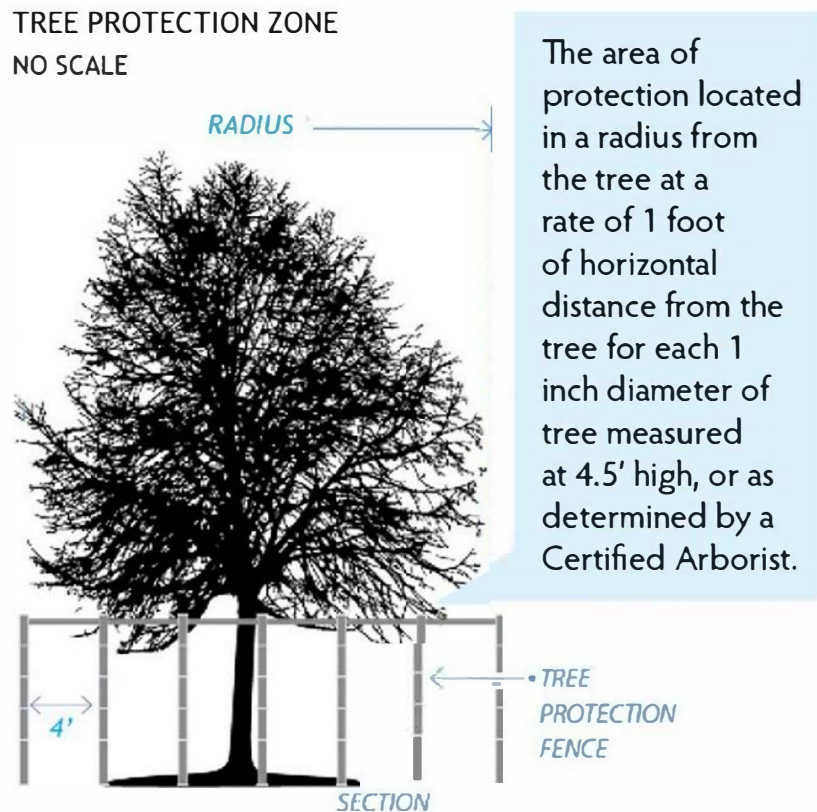

Tree protection measures can be as recommended by a Certified Arborist or, shall as a minimum, include the following protective measures:

1. Prior to any grubbing, clearing, grading, parking, preparation or storage of materials or machinery, or other construction activity on the site, all trees to be protected on the project site and adjacent to the site shall be clearly identified and temporary fencing shall be installed at the perimeter of the Tree Protection Zone. Protective fencing shall be of a material that cannot easily be moved, removed, or broken during construction activities. Chain link fencing a minimum of 4 feet in height is preferred. An alternative Tree Protection Zone fencing material secured by metal posts staked at no more than 4 feet on center around the Tree Protection Zone, as illustrated in **Figure 9.1031**, of the tree or Grove may be used with the approval of the Manager.
2. No soil compaction or removal of vegetation or tree branches within the Tree Protection Zone shall be allowed during construction, except as outlined by a Certified Arborist in a submitted Tree Protection Plan.
3. No machinery repair or cleaning shall be performed within 10 feet of the Tree Protection Zone of any trees identified for protection.
4. Digging a trench for placement of public or private utilities or other structure within the critical root zone of a tree to be protected is prohibited.